


GENERAL NOTES:

1. CAN BE USED IN CONTINUOUS OR INTERMITTENT OPERATION. INSTALL ON COLD WATER SUPPLY ONLY. NO BACKWASH REQUIRED.
2. **SCALESOLVER** MUST BE THE LAST STAGE IN THE TREATMENT CHAIN. DO NOT INSTALL ANY FILTERS AFTER **SCALESOLVER** OR BEFORE ANY DEVICES FOR WHICH SCALE PREVENTION IS REQUIRED. POU FILTERS (E.G. CARBON OR RO) ARE EXEMPT FROM THIS REQUIREMENT.
3. DO NOT APPLY PHOSPHATE OR ANY OTHER ANTISCALANT EITHER BEFORE OR AFTER **SCALESOLVER**.

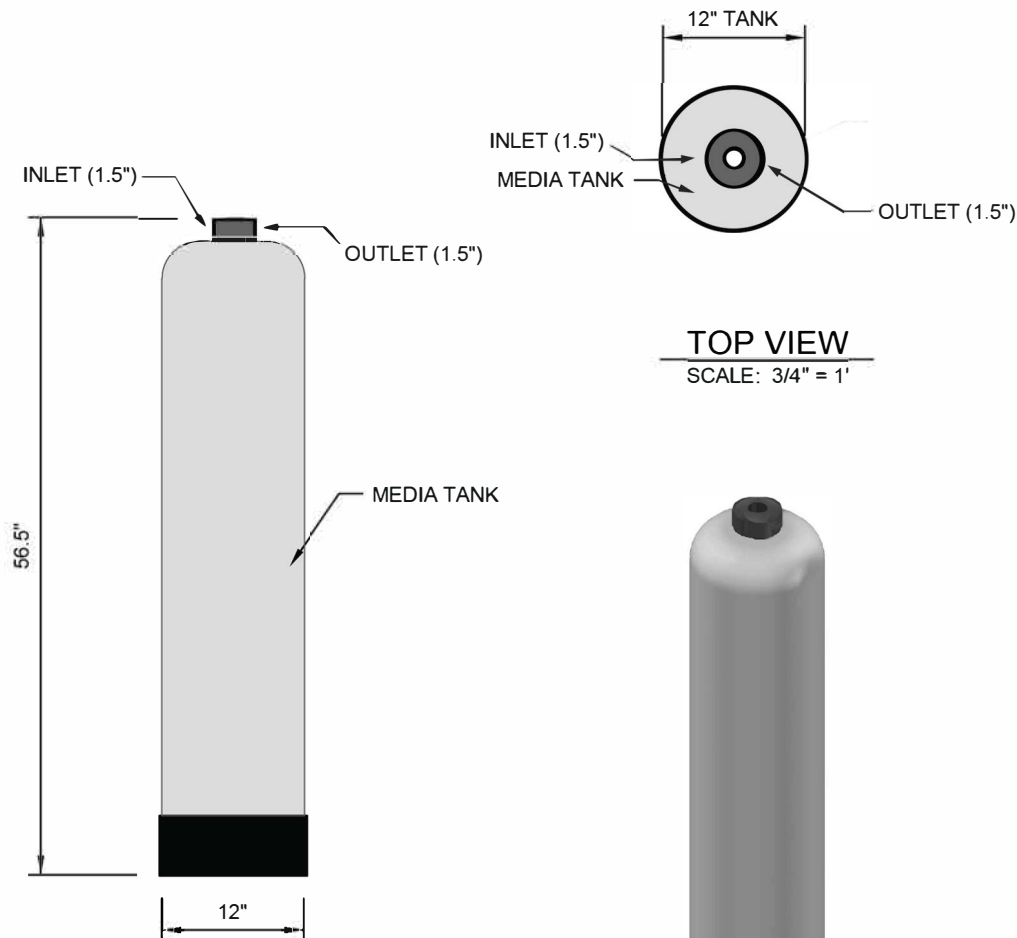

TOP VIEW

SCALE: 3/4" = 1'

FRONT VIEW

SCALE: 3/4" = 1'

ISOMETRIC VIEW

SCALE: N.T.S.

GENERAL SPECIFICATIONS

MAX. DIMENSIONS	56.5" x 12"
MAX. FLOW RATE	45 GPM (PER TANK)
MAX. TEMPERATURE	100° F (37.8° C)
REGULATED PRESSURE	MIN 25 PSI - MAX 100PSI
INLET CONNECTION	1.5" PVC UNION WITH SOCKET
OUTLET CONNECTION	1.5" PVC SOCKET
SERVICE WEIGHT (WET)	200 LBS.
DRY WEIGHT (LBS)	45 LBS.
MAX. FLOW RATE PRESSURE DROP	<5 PSI

WATER CHEMISTRY SPECIFICATIONS

pH	6.5 TO 8.5
MAX. HARDNESS	75 GRAINS (1300 PPM CaCO ₃)
TEMPERATURE	41 TO 140° F (5-60° C)
MAX. CHLORINE	<3 PPM
MAX. IRON, FERROUS	0.3 mg/L
MAX. MANGANESE	0.05 mg/L
MAX. COPPER	1.3 mg/L
OIL & H ₂ S	REMOVE PRE SCALESOLVER
POLYPHOSPHATES	REMOVE PRE SCALESOLVER

LIFESOURCE
WATER SYSTEMS®
523 SOUTH FAIR OAKS AVE.
PASADENA, CA 91105

SCALE SOLVER
MODEL: SS-6633 1.5"

FIGURE 1
DETAILS &
SPECIFICATIONS

FEATURES AND BENEFITS:

- **SCALE SOLVERS** ARE NOT WATER SOFTENERS
- ELIMINATES NEED FOR SALT ADDITIVES AND OTHER CHEMICALS – RETAINS ESSENTIAL MINERALS
- A MORE EFFECTIVE SCALE CONTROL ALTERNATIVE TO WATER SOFTENERS - MINIMIZING SCALE BUILD-UP DUE TO HARD WATER
- MAINTENANCE-FREE
- EASY TO INSTALL - NO ELECTRICITY REQUIRED, NO CONTROLLERS TO SET, NO BRINE DISCHARGE OR WATER WASTE FROM BACKWASH
- USES ENVIRONMENTALLY-FRIENDLY, SUSTAINABLE TECHNOLOGY
- EXTENDS LIFE AND IMPROVES ENERGY EFFICIENCY OF ALL HOT AND COLD WATER APPLIANCES, FIXTURES AND PLUMBING INFRASTRUCTURE
- REDUCES CONSUMPTION OF SOAP AND DETERGENT
- SYSTEM SIZING & INSTALLATION DEPENDENT ON PIPE SIZE, WATER USAGE, PEAK FLOW RATES & SPACE AVAILABILITY FOR TANKS
- IDEAL ALTERNATIVE FOR GROWING NUMBER OF TOWNS AND COUNTIES WHERE WATER SOFTENERS ARE BANNED

REPLACEMENT MEDIA:

- SS 6633 MEDIA SHOULD BE REPLACED EVERY 3-4 YEARS DEPENDING ON WATER USAGE VARIABLE

SPECIFICATIONS & CONNECTION SIZES:

- INLET 1.5" BRASS SWEAT FITTING
- OUTLET 1.5" BRASS SWEAT FITTING

REGULATORY APPROVALS:

- WQA TESTED AND CERTIFIED TO NSF/ANSI STANDARD 61.



SCALE SOLVER
MODEL: SS-6633 1.5"

FIGURE 2
NOTES & SPECIFICATIONS
(CONT.)